ROTOR SPRAY™ MINI SPRINKLER

Durable and reliable with excellent distribution uniformity. Vari-Rotor Spray™ can be adjusted to reduce volume of flow and radius of throw.

FEATURES & BENEFITS

- "C" Frame design for strength and distribution uniformity
- Full flow flipper suspended between two bearings
- Inverted model incorporates special dust cover to protect bearing
- UV Stabilised material: Frame – acetal, Base-acetal, Flipper-nylon

Vari-Rotor Spray™

SPECIFICATIONS

Applications

Suitable for vegetables, ornamentals, landscaped gardens, commercial tree and vine crops.

Technical Data

Recommended Operating Pressure: 100-200 kPa
Radius Range: 2.6 - 4.0 m (model dependent)
Flow Rate: 31 - 175 Lph (model dependent)
Inlet: 10-32 UNF thread, 4 mm

Rotor Spray™
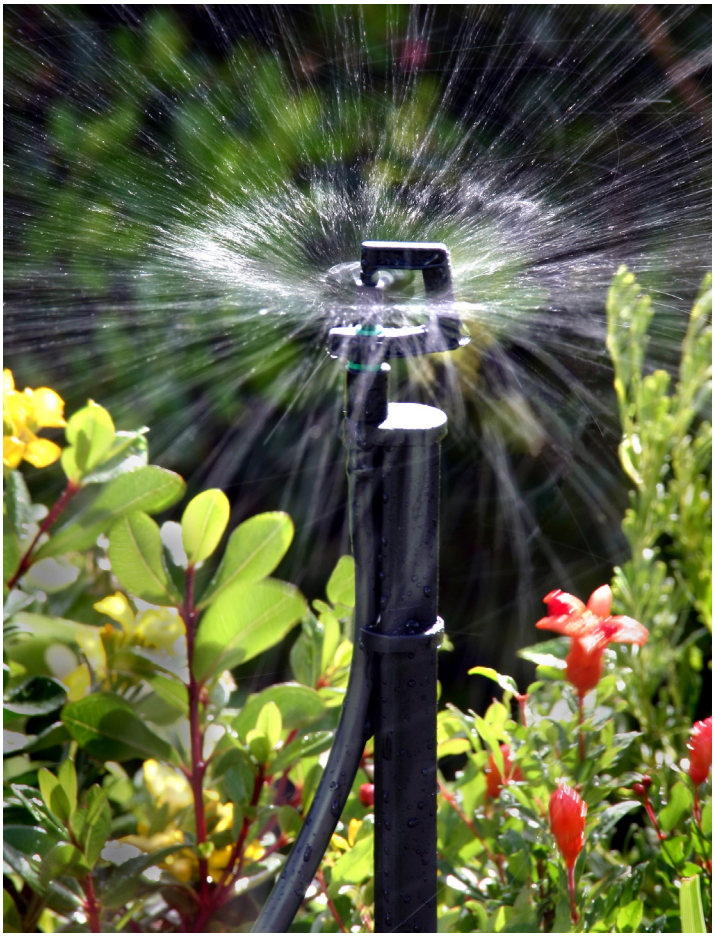
Inverted Rotor Spray™