



CETA™ PRESSURE COMPENSATING DRIPPERS

A turbulent flow, Pressure Compensating dripper available in 3 flows.

FEATURES & BENEFITS

- Take-apart for easy inspection and cleaning
- Self-flushing action with insect baffle to minimise blockages
- PC barbed dripper range: 2 lph, 4 lph and 8 lph with 4 mm spout
- Coloured bases to identify flow rates
- 4 lph PC Spike and In-Line Spike models to anchor CETA® at the plant

SPECIFICATIONS

Applications

Suited to pots, planter boxes, balconies, patios and landscape applications.

Technical Data


Recommended Operating Pressure: 50 - 300 kPa

Flow Rate: 2, 4, 8 Lph (model dependent)

Inlet: 4mm Barbed

Specifications			
		CETA® PC	CETA® PC Spike/ In-Line Spike
Dimensions Assembled	Height	25 mm	135 mm
	Width	20 mm	36 mm/42 mm
	Depth	16 mm	16 mm
Weight (approx.)		1.7g	5.0g
UV Stabilised Material	Base	Polypropylene	Polypropylene
	Spike	Polypropylene	Polypropylene
	Diaphragm	Silicone rubber	Silicone rubber
Connection Type	Inlet	Barb 4 mm	Barb 4 mm
	Outlet	Spout 4 mm	Spout 4 mm

Performance			
Pressure (kPa)	Discharge Lph		
	2 Lph	4 Lph	8 Lph
50	1.9	3.3	6.2
100	2.0	3.8	7.9
150	2.2	4.2	7.9
200	2.3	4.4	8.1
250	2.3	4.4	8.1
300	2.3	4.4	8.0

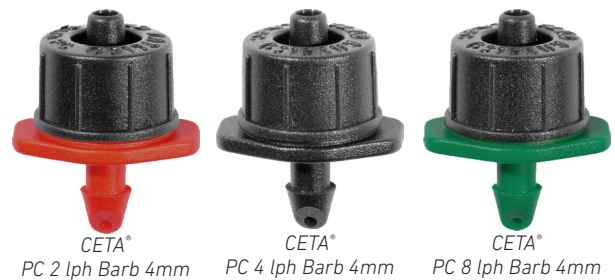

CETA®
PC 2 lph Barb 4mm

CETA®
PC 4 lph Barb 4mm

CETA®
PC 8 lph Barb 4mm



CETA® PC 4 lph
In-Line Spike 4mm

CETA® PC 4 lph
Spike 4mm

